

PRODUCT INFORMATION:

Aslon Rubber sprinttracks are specially developed for intensive use. The combination of short fiber and a high density in the mats results in a hard-wearing sport floor. Logos and designs are tufted into artificial grass. This makes our sprinttracks extremely hard wearing and durable.

YARN:

Material:	PE	
Yarn type:	5.500 Dtex PE.	(±5%)
Weight:	1.850 gr/m ²	(±10%)
Colour:	green and black	

TUFTING:

Gauge:	1/7	
Height:	15 mm	(±10%)
Stitches:	81.900 m ²	(±10%)

PRIMARY BACKING:

Backing:	Polypropylene
Type:	Double Backing

BACKING:


Backing:	Polyurethane
Type:	Scraper application

END PRODUCT:

Total height:	17 mm	(±10%)
Total weight:	2.665 gr/ m ²	(±10%)

DIMENSIONS:

Width:	2.000 mm
Length:	12.000 mm

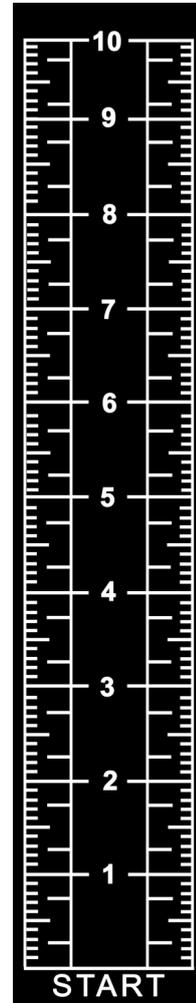

INSTALLATION:

The sprint track is delivered on a roll, so we advise to lay out the sprint track 24 hours in advance. Before installation, the surface must be dry, clean, and smooth. Use a leveling compound or filler if necessary to level the floor. It is also possible to place a rubber tile or foam pad underneath the sprint track. Unevenness can affect the sprint track.

Roll up half of the sprint track and attach double-sided tape or 2-component glue to the surface. Place the sprint track on top and press firmly. Then do the same with the other side.

Be careful not to use too much glue, as it can seep through the sprint track. Also, the sprint track cannot be removed without damage when glue is used.